



StoryWalk® Solutions

ALUMINUM FRAME AND ALUMINUM POST - FLUSH

For a 18" h x 24" w page, with a viewable area of 17" h x 23" w.


Flush mounted to the post

Standard post length is 60", for in ground installation

Longer posts and surface mounted posts are available..

Sign panel mounts 28-32" from grade

Prepare footing depth per your region's requirements. Ensure post is plumb and level while back filling with appropriate material.

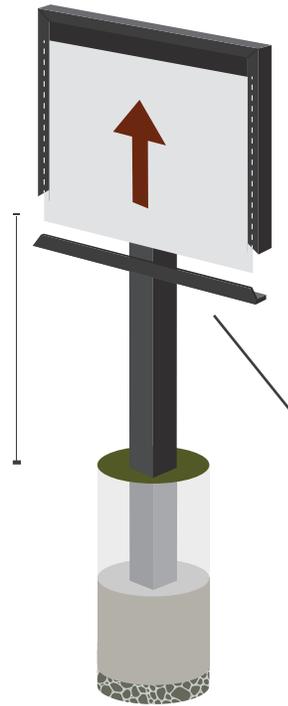

Removable bottom rail for page insertion.

The 2 sheets of acrylic - with the laminated page between them - slide up into the exposed channel on the bottom of the frame.

The powder coated aluminum frame has a 1 year warranty.

Made in the USA.

Assembly Instructions

1. Install the frame to the sleeve with the (4) allen head screws, one flat washer, and one nylock nut. The allen driver is provided, you will need a 7/16" socket to install the nylock nut. Do not use power tools as stainless steel hardware will gall and seize.
2. Remove the bottom frame rail 2 screws with the allen driver. Holding the rail in your hand, install a screw thru the rail, then push a white retaining washer down over the threads. Repeat. The retaining washer will help keep the screws in the frame rail which you replace pages.

Page Installation – first time

1. Remove the blue masking from both sides of the acrylic.
2. Place your page and optional colored backer between the sheets of acrylic. Be sure your pages are numbered, or you know what page order they should be installed.
3. Remove the bottom frame rail using the provided driver.
4. Slide the sheets up into the exposed frame channel.
5. Replace the bottom rail.

Cleaning Instructions

Use a soft cloth and dilute soap and water to wash and dry the displays.

DO NOT USE ammonia cleaners (Windex) or paper towels.

